

Compact Knowledge

Barrier-free bathrooms – essential for personal mobility and independence



At a glance

✓ **DIN 18040**

Defines the criteria that a barrier-free bathroom has to fulfil.

✓ **Barrier-free or wheelchair-accessible?**

Barrier-free bathrooms must be accessible for those with motor impairment, sensory impairments and those with poor physical strength. For a bathroom to be wheelchair-accessible as well as barrier-free, it will need to meet more rigorous or additional requirements in some areas.

✓ **Space to manoeuvre**

Spaces that are planned around sanitaryware to allow easier manoeuvrability for a wheelchair or walker.

✓ **Level-access showers**

Level-access showers offer maximum convenience. They are easily accessible and suitable for both wheelchairs and walkers.

✓ **Washbasins**

Wheelchair-accessible washbasins offer wheelchair users optimum under-sink leg clearance.

✓ **Fittings**

Contact-free fittings and single-lever mixers are easy to operate even by those with poor physical strength or motor skills.

✓ **WC**

Key features of a barrier-free WC are suitable height, sufficient space to manoeuvre and needs-based grab bars.

Barrier-free bathrooms – essential for personal mobility and independence in all situations

In Scandinavia and the Netherlands, the construction of accessible buildings has been standard practice for many years.¹ This involves clear planning, construction and furnishing strategies that take into consideration the requirements of all users and ensure that domestic buildings, commercial buildings and public spaces consider the highly varying requirements of the handicapped and disabled to the greatest extent possible. In Germany, the principle of the "construction of accessible buildings" is also a growing imperative. And with good reason: in 2017, records showed that some 2.5 million² senior citizens with limited mobility are currently living in Germany, with this figure set to increase in the future. So it stands to reason that the demand for barrier-free homes is also on the increase, with the majority of people keen to age within the comfort of their own four walls.



Unrestricted home living

The requirements to be met by barrier-free homes/spaces are defined in the standard DIN 18040. The layout and furnishing of rooms should enable residents who use a wheelchair or those suffering from loss of mobility, strength or vision to get around as much as possible without help. A well-planned bathroom in particular can enhance quality of life, because the ability to use the shower and toilet independently


makes an invaluable contribution towards a person being able to maintain their privacy and independence. And barrier-free accessibility does not need to lessen the feel of homeliness or comfort: in modern hotels, for example, which tend to implement current building standards more frequently than private homes, it is possible to find many barrier-free bathrooms where a spacious design, a clever layout and attractive

furnishings combine to create a perfect balance between contemporary clarity and elegant warmth that is a joy to use.


Space and clearance

For a bathroom to be barrier-free it must, above all, offer sufficient space. Wheelchair users especially need sufficient space to be able to manoeuvre freely. A spacious bathroom layout not only increases convenience and reduces the risk of falls or injuries, but also allows carers and helpers greater freedom of movement. The dimensions that must be adhered to are specified

in the standard DIN 18040. It goes without saying that the precise planning of the bathroom always depends on the respective on-site conditions, such as floor space, or the required bathroom landscape.

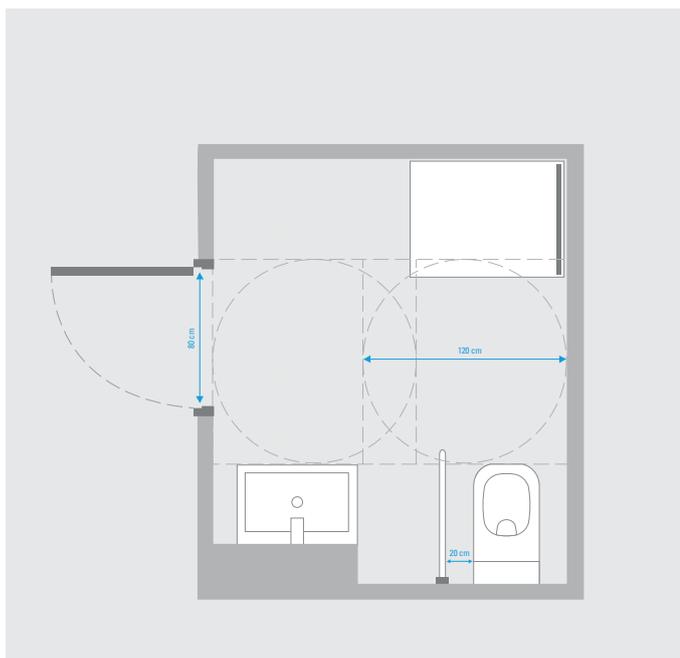

Sample layout of a barrier-free bathroom

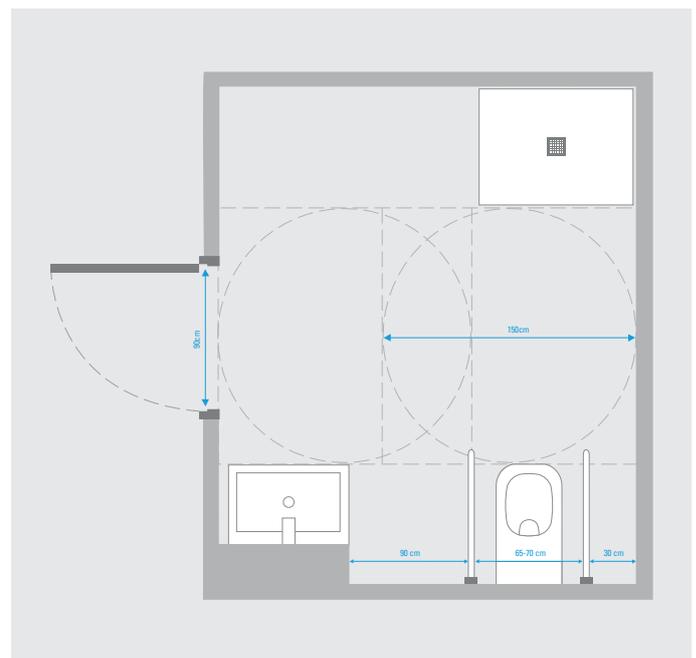

Sample layout of a wheelchair-accessible bathroom

"Barrier-free" is not synonymous with wheelchair-accessible. That is clear from the provisions for space allocation: a barrier-free bathroom must provide a minimum space of 120 x 120 cm in front of the WC, washbasin, bath or in the shower (these spaces may not overlap), while doors must offer a minimum clearance of 80 cm. However, in order to be deemed wheelchair-accessible, a room must

provide dimensions of 150 x 150 cm and 90 cm respectively. But there are also other measures to be considered, ones that aid those with very different handicaps. Varying, high-contrast colours, for example, offer ease of orientation to those with visual impairment – particularly important in bathrooms where people often remove visual aids.

Greater convenience with level-access showers

Many senior citizens prefer using a shower to a bath, and level-access showers are especially practical. There are no barriers to be overcome and the shower area is easily accessible with a walker or wheelchair.

However, it is important to note that not every level-access shower is necessarily barrier-free. In addition to the aforementioned requirements on dimensions, there are a number of other criteria that also need to be fulfilled:

- **Floor**
Anti-slip floor covering
- **Floor/shower area interface**
Flush, with no protruding edges wherever possible

- **Wall structure**
Strong enough to be able to accommodate the retro-fitting of shower seats and/or grab bars
- **Fittings**
Single-lever mixers or contact-free fittings are easy to operate. Levers are pointed downwards in order to reduce the risk of injury. Contact-free fittings are fitted with a temperature limiter in order to prevent scalding. In wheelchair-accessible showers, fittings should be mounted 85 cm above the floor so that they are also within easy reach of those sitting.

In public facilities, such as hospitals, hotels, homes and public swimming baths, level-access showers have long been standard. They are also enjoying increasing popularity in new builds in the private sector.

Planning a slope

In order to ensure reliable and problem-free drainage, the installation of a level-access shower, requires careful and accurate planning of the slope. The shower area must be designed with a slight slope in order to ensure proper drainage of the water. Shower channels have a slope of 2% and it is important not to exceed this in barrier-free bathrooms, as the steeper the slope, the greater the risk of slipping. However, the precise design of the slope will depend on the position of the drain and the floor surface. A centrally placed point drainage is recommended for wheelchair-accessible showers.

Low floor structures

While new drain bodies are generally significantly flatter than older models, the

available floor structure still often doesn't offer the minimum height to create the slope required for a level-access shower. This is a problem frequently encountered when renovating older bathrooms. In such scenarios, drainage systems with a pump present the simplest solution as they are powerful enough to channel the accumulating shower water through pipes located higher than the drain.

Planning a slope in the door area

Generally speaking, the slope is laid so that it runs towards the drain and away from the door, whereby it is important to ensure that no water from waterproofed areas can penetrate areas that are not waterproofed. Depending on the intensity of the water impact, it may be necessary to install either

a 1 cm raised threshold or even a channel in the door area. However, such measures are not generally necessary in private bathrooms.

According to the standard DIN 18534-1, the waterproofing must also be extended up the reveal and be laid behind the frame. However, how the waterproofing is executed in the area of the door will always depend on the location of the door, the slope of the shower area and whether there is a shower enclosure.

Wheelchair-accessible washbasins – ideal for use while sitting down

Flush-mounted and spacesaver traps take up considerably less space than conventional solutions. This ensures that wheelchair users have sufficient leg clearance to reach the washbasin. But it is also useful for those who simply like to be seated when washing. Such traps also reduce the risk of injury from impact or scalding.

The correct fittings also help create a barrier-free washbasin. Similarly, we recommend single-lever mixers and contact-free options in the shower. Wheelchair users also benefit from storage shelves in close proximity to the washbasin and lower hanging mirrors so that they can also be reached or viewed from a seated position.

Needs-based WCs make life easier

The seat of standard toilets is 42 cm above the floor – too low for many people suffering from reduced mobility due to age, disability or illness. According to the standard DIN 18040, a height of 46 to 48 cm considerably facilitates easy and pain-free standing/sitting. If catering for a larger household, investment in a height-adjustable WC might

also be worthwhile. It is also important to plan in sufficient lateral clearance to the wall or to other sanitaryware items. This should be at least 20 cm – for wheelchair users, 90 cm on one side and 30 cm on the other. Drop-down grab bars on the other side also make use easier.

DIN 18040

| | |
|--|---|
| <p>DIN 18040</p> | <p>Construction of accessible buildings – Design principles</p> |
| <p>Aim of the standard</p> | <p>The standard DIN 18040 serves the planning, dimensioning and construction of buildings from the standpoint of accessibility. The aim is to enable all citizens to take part in society and move freely, without particular impediments and basically without help from others. In conformity with the German Equal Opportunities for People with Disabilities Act (BGG), the standard DIN 18040 aims to ensure that the existing infrastructure can be used by all citizens equally.</p> |
| <p>Breakdown</p> | <p>The standard DIN 18040 comprises three parts:</p> <ol style="list-style-type: none"> 1. Publicly accessible buildings 2. Dwellings 3. Public transport, recreation areas and playgrounds <p>Parts 1 and 2 are the ones relevant to drainage technology.</p> |
| <p>DIN 18040-1</p> | <p>Construction of accessible buildings – Design principles – Part 1: Publicly accessible buildings</p> <p>Within the context of this standard, this includes:</p> <ul style="list-style-type: none"> – Cultural and educational institutions, e.g. museums – Sports and leisure facilities – Health care facilities – Office and administrative facilities and court houses – Shops and restaurants – Parking spaces and garages – Public toilet facilities <p>As areas intended for public use should be accessible to all citizens, regardless of physical, motor or cognitive impairment, it may be necessary to meet higher standards in such cases. For example, spaces must be wheelchair-accessible, while in private dwellings it may be sufficient just to implement barrier-free dimensions, depending on individual needs.</p> |
| <p>DIN 18040-2</p> | <p>Construction of accessible buildings – Design principles – Part 2: Dwellings</p> <p>This standard describes under which technical prerequisites buildings and structures are considered barrier-free. The standard differentiates between "wheelchair-accessible" (subject to more rigorous requirements) and barrier-free. The letter "R" indicates that a building has been built/must be built as a wheelchair-accessible structure (see "Dimensions in the bathroom": DIN 18040-2 R). This part of the standard is designed to facilitate everyday life for as many people as possible, such as wheelchair users, people with sensory/cognitive impairments, people of tall and small stature, senior citizens, children and well as persons with prams or luggage.</p> |
| <p>Dimensions in the bathroom</p> | <p>The following tables show an excerpt of the key prerequisites for barrier-free/wheelchair-accessible bathrooms acc. to DIN 18040-1 and 18040-2. The key focus here is on the dimensions of selected sanitaryware items and the space to manoeuvre in front of them.</p> |

Dimensions in the bathroom

| Recommended measurements of sanitary objects | DIN 18040-2 | | DIN 18040-2 R* | | DIN 18040-1 | |
|---|-------------|-------|----------------|-------|-------------|-------|
| | Width | Depth | Width | Depth | Width | Depth |
| Dimensions in cm | | | | | | |
| Single washbasin | 60 | 55 | 60/75 | 55/60 | 60/75 | 55/60 |
| Hand washbasin | 45 | 35 | 45 | 45/50 | 45 | 45/50 |
| Water closet, front-of-wall | 40 | 75 | 40 | 70 | 40 | 70 |
| Water closet, for concealed wall installation | 40 | 60 | 40 | 70 | 40 | 70 |
| Shower trays/shower areas | 120 | 120 | 150 | 150 | 150 | 150 |
| Washing machine/dryer | 60 | 60 | 60 | 60 | 60 | 60 |

| Minimum spaces to manoeuvre | DIN 18040-2 | | DIN 18040-2 R* | | DIN 18040-1 | |
|---|-------------|-------|----------------|-------|-------------|-------|
| | Width | Depth | Width | Depth | Width | Depth |
| Dimensions in cm | | | | | | |
| Single washbasin | 120 | 120 | 150 | 150 | 150 | 150 |
| Hand washbasin | 120 | 120 | 150 | 150 | 150 | 150 |
| Water closet, front-of-wall | 120 | 120 | 150 | 150 | 160/220 | 150 |
| Water closet, for concealed wall installation | 120 | 120 | 150 | 150 | 160/220 | 150 |
| Shower trays/shower areas | 120 | 120 | 150 | 150 | 150 | 150 |
| Washing machine/dryer | 120 | 120 | 150 | 150 | 150 | 150 |

*R = wheelchair-accessible

Glossary

Anti-slip floor covering

For the safety of residents/users, anti-slip floor coverings must be laid within the context of the construction of barrier-free buildings. In publicly accessible buildings and the entrance areas of apartment blocks, BGR 181 requires a minimum of R 9, and in shower areas it specifies floor coverings of quality level B acc. to GUV-I 8527.

Quality levels of anti-slip coating

In barefoot areas, which includes the shower area, there are three quality levels to describe the anti-slip properties of flooring: A for dry floors, B for wet floors and C for swimming pools.

Space to manoeuvre

Free spaces planned in a bathroom or other rooms to allow space for manoeuvre. This is particularly important for wheelchair users due to, among other reasons, their large turning radius.

Construction of accessible buildings

The aim of designing buildings and public spaces so that they are accessible to all citizens, without exception or restriction. The prerequisites to achieve this goal can be found, inter alia, in the standards DIN 18040, DIN 32984 and DIN 32975.

'R' value

The 'R' value indicates the degree of slip resistance of a floor covering. This is determined by two testers walking over a new sample of the floor covering to be tested in standardised work shoes, during which the angle of inclination is gradually increased. When one of the two testers begins to slip or feels unsafe, the angle of inclination and the 'R' value are determined. The standard DIN 51130 regulates the classification of floor coverings, which ranges from R 9 to R 13.

DIN 18040

Both the German constitution and the UN Disability Rights Convention require the safeguarding of human rights and certain fundamental rights. This underscores the importance of the construction of accessible buildings in order to enable people with limited mobility to also lead independent lives. The standard DIN 18040 implements this requirement with concrete instructions for planning and construction. It applies to publicly accessible buildings, as well as residential apartments, public transport and spaces.

Single-lever mixers

Washbasin fittings with a single lever, as opposed to mixer taps that have separate levers, or similar, for the adjustment of hot and cold water. The advantage of single-lever mixer taps is that they make it possible to regulate the direction and heat of your tap water with the use of just one hand.

Sources

1. Nettelstroth, Ulrich: Barrier-free accessibility is not yet standard, in: Märkische Allgemeiner (2017), URL: <http://sonderthemen.maz-online.de/barrierefrei-ist-noch-nicht-standard-20497> (last visited on 08 March 2017)
2. Terragon: In focus: What exactly does barrier-free mean?, in: Newsletter 2017, issue 1, URL: <http://www.terragon-gmbh.de/newsletter/terragon-2017-01.html#imedit> (last visited on 08 March 2017)